

## DHC Trend Sizing Guide for Commercial Point-of-Use



### DHC 3/3.5-1 Trend

<b>3.0 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	0.4 GPM 	0.5 GPM 	0.7 GPM 	1.1 GPM 
<b>3.5 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	0.5 GPM 	0.6 GPM 	0.85 GPM 	1.3 GPM 

### DHC 4/6-2 Trend

<b>3.8 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	0.5 GPM 	0.7 GPM 	0.9 GPM 	1.4 GPM 
<b>6.0 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	0.85 GPM 	1 GPM 	1.5 GPM 	2.3 GPM 

### DHC 8/10-2 Trend

<b>7.2 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	1 GPM OR	1.3 GPM OR	1.8 GPM OR	1.1 GPM 	2.7 GPM OR	1.5 GPM 	
<b>9.6 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	1.4 GPM OR	1.7 GPM OR	1.2 GPM 	2.3 GPM OR	1.5 GPM 	3.6 GPM OR	2 GPM 


### DHC 12/15-2 Trend

<b>12.0 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	1.7 GPM OR	1.3 GPM 	2.2 GPM OR	1.55 GPM 	2.9 GPM OR	1.9 GPM OR	4.6 GPM OR	2.5 GPM OR	1.7 GPM 
<b>14.4 kW</b>	MAX. FLOW RATE POSSIBLE FIXTURES	2 GPM OR	1.6 GPM 	2.6 GPM OR	1.9 GPM OR	3.5 GPM OR	2.3 GPM OR	5.5 GPM OR	3 GPM OR	2 GPM 

Max. Flow Rates shown for 240V models are correct if installed with 240V service. Increase one model size if unit will be installed with 208V service.

#### FIXTURES & FLOW RATES & TEMP. USED TO CALCULATE MAX. FLOW RATE (Higher temps reduce flow rates)

<b>LAV SINK</b> (0.5-1.5 GPM)		90°F
<b>MULTIPLE SINKS</b>		
<b>SHOWER</b> (1.0-2.5 GPM)		105°F
<b>KITCHEN SINK</b> (1.0-2.2 GPM)		105°F
<b>UTILITY/JANITOR'S SINK</b> (1.0-2.2 GPM)		120°F

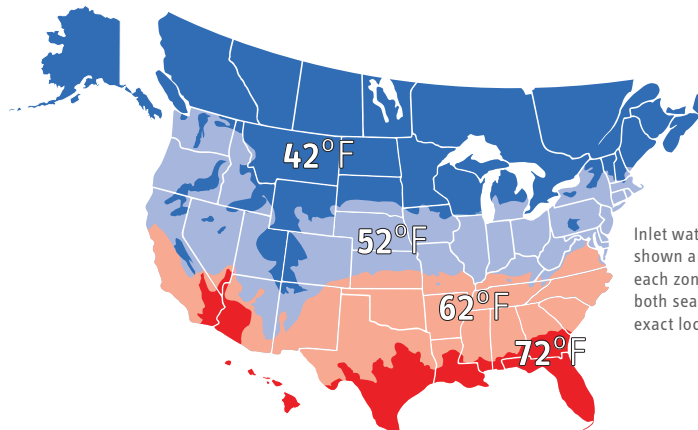

Inlet water temperatures shown are an average for each zone, and may vary both seasonally and by exact location.

Scroll for more DHC Trend models ↓

## DHC Trend Sizing Guide for Commercial Point-of-Use

