


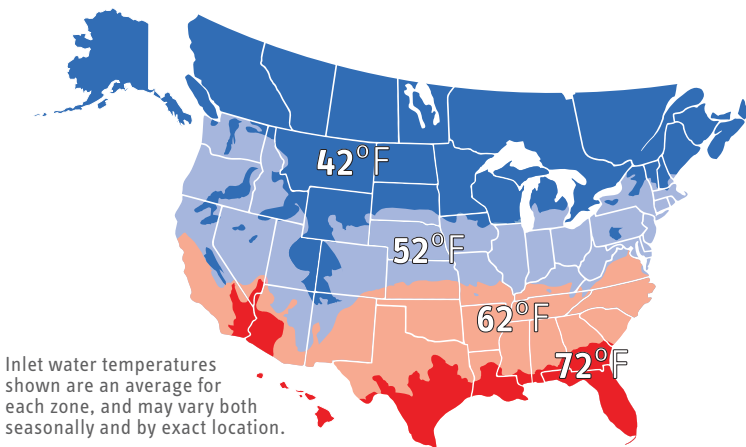


DHX 15 Select Electric Tankless Water Heater Sizing Guide

DHX 15 Select




| 14.4 kW | MAX. FLOW RATE POSSIBLE FIXTURES | 42°F | 52°F | 62°F | 72°F |
|---------|-------------------------------------|---|---|--|---|
| | | 1.6 GPM  OR  | 1.9 GPM  OR  | 2.3 GPM  OR  | 3 GPM  OR  |

Flow rates shown are correct for installation with 240 V power.
Please contact technical support if installation will be with 208 V power.



FIXTURES & FLOW RATES

for model possibilities and temp. for max. flow rate calculation

| | | |
|---|--|-------|
| SINGLE LAV SINK (Range 0.5-1.5) |  | 90°F |
| SHOWER (Range 1.0-2.5) |  | 105°F |
| KITCHEN SINK (Range 1.0-2.2) |  | 105°F |

Higher temps reduce flow rates

Continued on next page ›

DHX 15 Select Electric Tankless Water Heater Sizing Guide

